



Multipurpose spill bund UNIQUE

The spill bund is specially designed for containing leaking hazardous substances in industrial halls. Thanks to its simple structure, which can be assembled in two steps, and the wide range of materials from which it can be made, it is suitable for any environment. It can be placed under tanks with chemical substances, containers, pipes, barrels, etc. It can also be used as a spill bund for decontamination of machinery and vehicles.



- ▶ Easy assembly in only two steps
- ▶ Tailored production based on specific requirements – any sizes
- ▶ The spill bund can be adapted to any other purpose and environment – the material can be chosen for a wide range of mechanical, chemical, fire and electrostatic resistance
- ▶ The bund can be completely unfolded to a flat surface and to be washed
- ▶ 2 types of wall supports – rigid and collapsible
- ▶ It can be fitted with a drain hole and a ball valve
- ▶ Favourable price
- ▶ Fast delivery
- ▶ For storage, the bund can be folded into a small packet



**A simple and effective
device for containing leaking
substances not only in industrial
applications**



It can be easily assembled in only two steps – unfolding the tarp and fixing the wall supports

An example of using the bund in a storage hall or industrial hall



The front of the bund is secured with collapsible T-shaped wall support

The design of the collapsible wall support allows it to be driven over by a forklift

Rigid L-shaped wall support anchored under the bund



Collapsible T-shaped wall support



The spill bund filled with liquid

Anchoring rigid L-shaped wall supports under the bund or away from the bund




Technical details

The bund is made from a durable industrial textiles with a special surface finish of different degrees of fire and mechanical resistance. The outer wall supports around the entire perimeter of the bund are fitted with a special Quick-Lock and are made from durable stainless steel (or galvanized steel). They consist of a removable stabilizing part (rigid L-shaped variant and / or collapsible T-shaped variant) and a part which is an integral part of the upper edge of the bund and is equipped with the above-mentioned simple Quick-Lock into which the support is easily anchored. Thanks to this principle, the bund is quickly assembled in only two steps – unfolding the tarp and fixing the wall supports. The L-shaped wall supports are preferably mounted under the bottom of the bund. The advantage is that, if desired, the design of the brackets' locks allows the bracket to be mounted away from the bund, for example, if a pallet or other object is placed close to the inner edge of the bund. The use and assembly of the collapsible variant of the T-shaped wall support is fast and enables future controlled tilting of the side of the bund, eg. due to the need to drive into the space of the bund with a forklift. The design of the support allows it to be driven over by a forklift without damaging the bund or the support.

ATTENTION! If several L-shaped wall supports are installed one behind the other from the bath, it is necessary to ensure the stability of the bath by loading or otherwise anchoring it to the floor. If necessary, the bund can be fitted with a drain hole and a ball valve. A bag for the bund can be provided on request.

Due to the wide range of product types, each bund has a label providing its definite specifications.

Name
Fire, mechanical and special resistance of the material

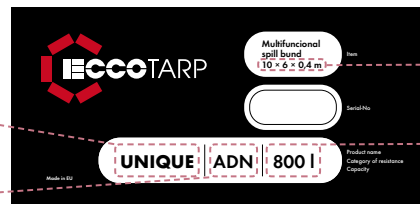

Size

Capacity

Material specification and mechanical resistance

The bund can be made according to customer's requirements. He can specify not only the size, but after professional consultation with the sales department, also the material from which the bund is to be made, so that it can be used in a specific environment (industrial production halls, industrial warehouses, etc.).



Not all of these features can be combined. Our web Configurator will help you with choosing the right parameters of the Unique bund: <https://unique.eccotarp.com/>



Specifications

Fire resistance:

- A – non-flammable
- B – flammable with difficulty
- C – flammable

Mechanical resistance:

- A – 630 g/m²
- B – 640 g/m²
- C – 680 g/m²
- D – 900 g/m²
- E – 1300 g/m²

Special properties:

- A – antistatic
- B – 100% waterproof
- N – no special properties

Example:

UNIQUE / ADN / 800 I = inflammable bund from 900g PES/PVC, without special properties, capacity: 800 l